


RJ

不锈钢多级离心泵

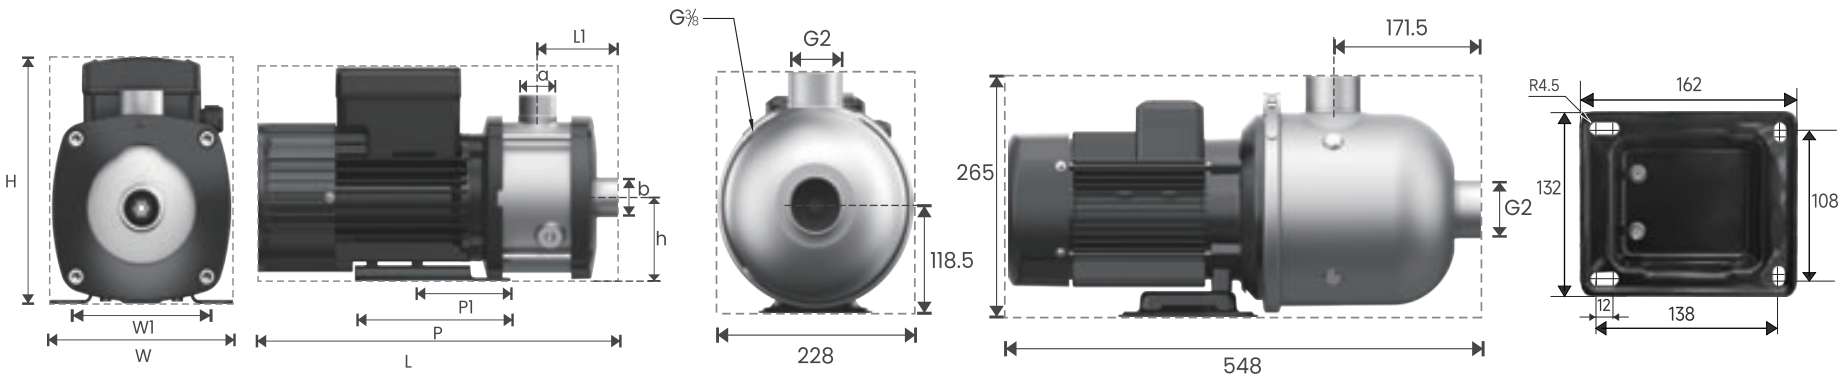

产品安装尺寸:

产品型号	L	L1	H	h	W	W1	P	P1	a	b
RJ(T)3-30	377	82	202	79	158	125	155	95.5	G1	G1
RJ(T)3-40	395	100	202	79	158	125	155	95.5	G1	G1
RJ(T)3-50	413	118	202	79	158	125	155	95.5	G1	G1
RJ4-20	336	72	202	79	158	125	155	95.5	G1	G1¼
RJ4-30	336	72	202	79	158	125	155	95.5	G1	G1¼
RJ4-40	431	90	202	79	158	125	155	95.5	G1	G1¼
RJ(T)5-30	377	82	202	79	158	125	155	95.5	G1	G1¼
RJ(T)5-40	395	100	202	79	158	125	155	95.5	G1	G1¼
RJT5-50	429	118	224	86	171	141	155	125	G1	G1¼
RJT5-60	447	136	224	86	171	141	155	125	G1	G1¼

不锈钢多级离心泵

RHEKEN日井
高品质水泵专家



全国热线: 400-657-6857

RJ

不锈钢多级离心泵

	产品型号	电源	电流	输入功率	最大流量	最大扬程	额定流量	额定扬程	进口径	出口径
绿色	RJ(T)3-30	220V/50Hz	2.7 (1.0) A	400W	5m³/h	28m	3m³/h	20m	DN25	DN25
	RJ(T)3-40	220V/50Hz	3.5 (1.3) A	500W	5m³/h	37m	3m³/h	27m	DN25	DN25
	RJ(T)3-50	220V/50Hz	4.0 (1.5) A	600W	5m³/h	45m	3m³/h	34m	DN25	DN25
	RJ4-20	220V/50Hz	2.3A	400W	7 m³/h	20m	4m³/h	16m	DN32	DN25
	RJ4-30	220V/50Hz	3.1A	600W	7 m³/h	30m	4m³/h	23m	DN32	DN25
浅绿色	RJ4-40	220V/50Hz	3.6A	800W	7 m³/h	40m	4m³/h	31m	DN32	DN25
	RJ(T)5-30	220V/50Hz	2.7 (1.5) A	600W	8m³/h	28m	5m³/h	20m	DN32	DN25
	RJ(T)5-40	220V/50Hz	3.6 (2.0) A	800W	8m³/h	38m	5m³/h	27m	DN32	DN25
	RJT5-50	380V/50HZ	2.4A	1100W	8m³/h	47m	5m³/h	34m	DN32	DN25
	RJT5-60	380V/50HZ	2.8A	1300W	8m³/h	57m	5m³/h	42m	DN32	DN25
黄色	RJT8-30	380V/50HZ	2.6A	1100W	15m³/h	30m	8m³/h	26m	DN50	DN50
	RJT8-40	380V/50HZ	3.2A	1500W	15m³/h	40m	8m³/h	37m	DN50	DN50
	RJT8-50	380V/50HZ	4.5A	2200W	15m³/h	50m	8m³/h	45m	DN50	DN50
	RJT12-30	380V/50HZ	3.3A	1800W	18m³/h	37m	12m³/h	29.5m	DN50	DN50
	RJT12-40	380V/50HZ	4.4A	2400W	18m³/h	48m	12m³/h	39.5m	DN50	DN50
	RJT16-20	380V/50HZ	4.0A	2200W	26m³/h	25m	16m³/h	21m	DN50	DN50
	RJT20-20	380V/50HZ	4.0A	2200W	28m³/h	27m	20m³/h	20m	DN50	DN50

产品特点：

① 不锈钢过流部件；②大流量；③高扬程；④轻便耐用；⑤智能控制；⑥安静低噪。




应用场景：

不锈钢多级离心泵型号多样，具有耐腐蚀、耐高温、卫生等特点，广泛应用在工业、建筑、市政和民用领域也适用于化工和食品加工行业。

应用条件：

- 环境温度: 0-40℃，输送介质温度: 0-90℃
- 海拔高度:<1000米
- 固体杂质的体积比不超过0.1%，粒度不大于0.2mm
- 相对湿度: <90%

型号说明：

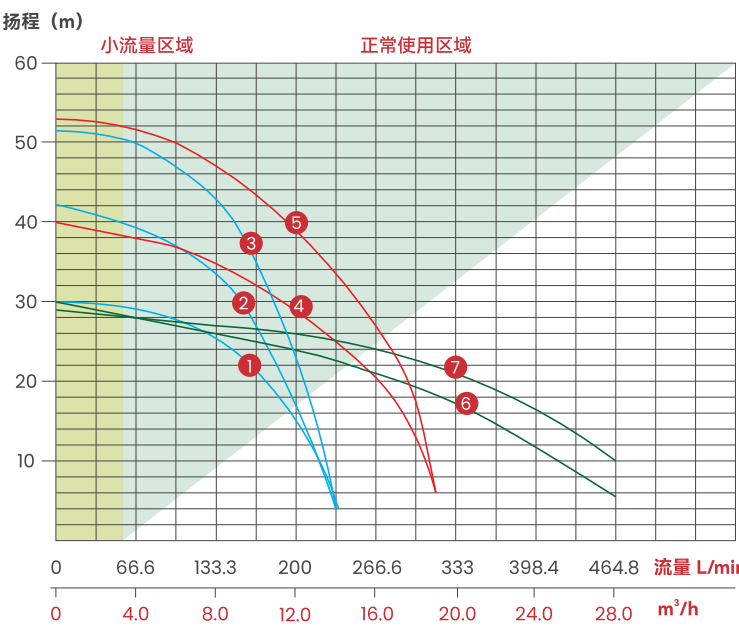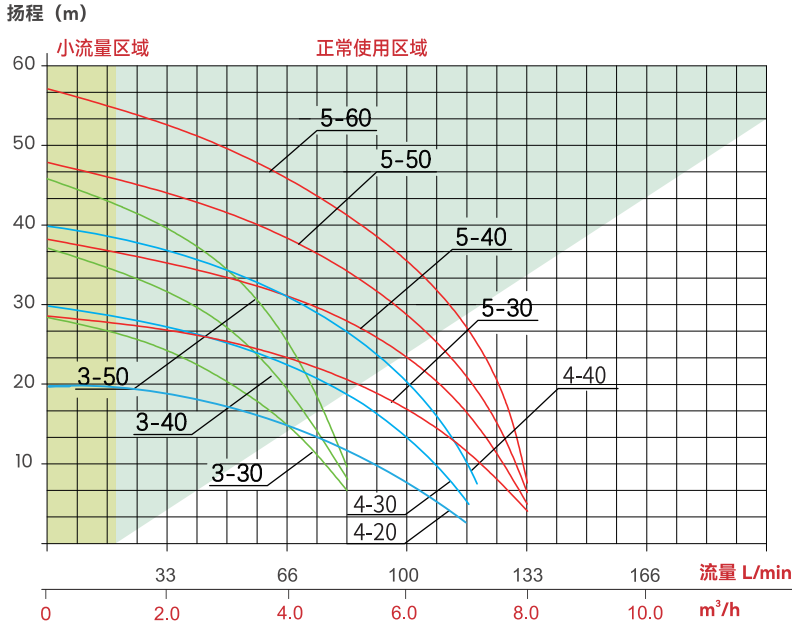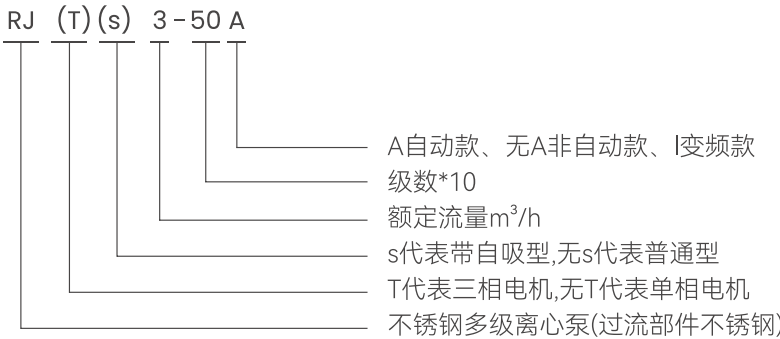

产品型号	输入功率	流量	L/min	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
			m³/h	16.6	33.3	50	66.6	83.3	100	116	133.3
RJ(T)3-30	400W	扬程 (m)	26	25	20	15					
RJ(T)3-40	500W		36	32	27	19	8				
RJ(T)3-50	600W		46	42	34	26	11				
RJ4-20	400W		19	18	17	16	12	8	4		
RJ4-30	600W		28.5	27	25	23	18	13	7		
RJ4-40	800W		39	37	35	31	26	19	10		
RJ(T)5-30	600W		28	27	26	23	20	15	8		
RJ(T)5-40	800W		36	34	32	30	27	23	16		
RJT5-50	1100W		48	46	44	41	34	31	23	10	
RJT5-60	1300W		58	56	54	51	42	40	30	15	

产品型号	输入功率	流量	L/min	7.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	25.0	28.0
			m³/h	116	133.3	166.6	200	232	266.6	300	333	365.2	415	464.8
① RJT8-30	1100W	扬程(m)	28	27	23	15	4							
② RJT8-40	1500W		37	35	31	17	5							
③ RJT8-50	2200W		48	45	40	23	6							
④ RJT12-30	1800W		35	34	33	30	26	24						
⑤ RJT12-40	2400W		47	46	44	40	34	26						
⑥ RJT16-20	2200W		27	26	25	24	23	21	20	18	15			
⑦ RJT20-20	2200W		28	27	27	26	24	22	21	20	16	14	10	